

纺织品/服装/羊毛/棉花打包机

Textile/Clothes/Wool/Cotton Balers


适用范围

专门用于二手衣服，被子，鞋子，羊毛，棉花等产品的回收打包，被大量使用在旧衣服，服装，羊毛，棉花回收工厂


Usage

Widely applied by second-hand clothes, wool, cotton recycling plants for compressing second-hand clothing, comforters, shoes, wool, cotton etc.

Diagram (Model XTY-500LTX7555)

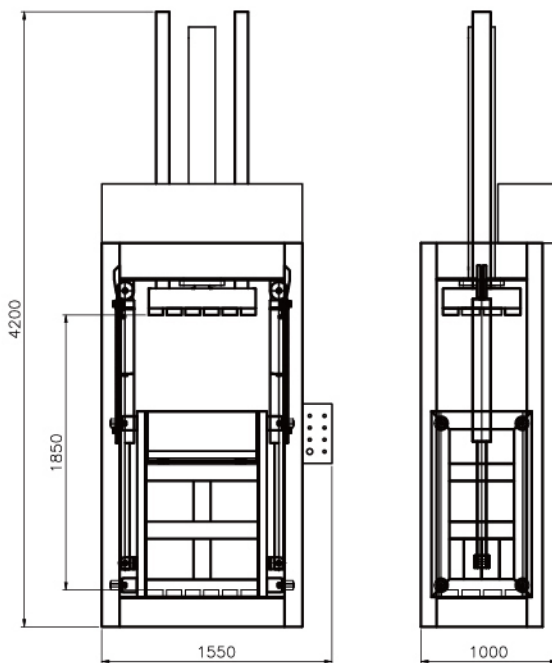

Bale Size (Model XTY-500LTX7555)

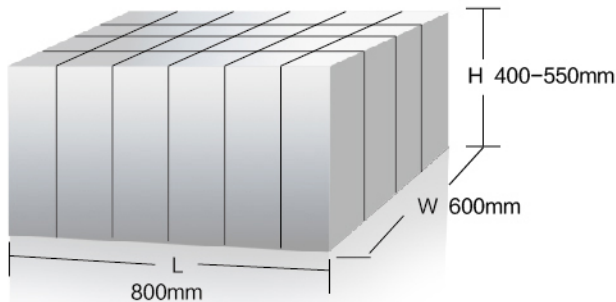

参数 Specifications

| 型号 | XTY-300LTX6040 XTY-300LTX7038 | XTY-500LTX7555 | XTY-1200LTX7540 | XTY-1500LTX11080 |
|---|--|---------------------|---------------------|----------------------|
| 压力 Pressure | 30tons | 50tons | 120tons | 150tons |
| 加料口尺寸 (L*H) Feed Opening Size (L*H) | 600*400mm 700*400mm | 750*350mm | 750*450mm | 1100*600mm |
| 压缩腔高度 Baling Chamber Height | 1250mm/1200mm | 1850mm | 1700mm | 1850mm |
| 包块尺寸 (L*W*H, H可调) Bale Size (L*W*H, H is adjustable) | 630*430*(400-600)mm 730*400*(250-600)mm | 800*600*(400-550)mm | 800*450*(350-500)mm | 1150*850*(500-900)mm |
| 包块重量 Bale Weight | 40-60kgs | 80-120kgs | 90-150kgs | 300-400kgs |
| 功率 Power | 7.5kw | 11kw | 18.5kw | 18.5kw |
| 机器重量 Machine Weight | 1800kgs | 2800kgs | 3800kgs | 6000kgs |
| 机器外观尺寸 Machine Overall Dimension | 1250*800*3700mm 1200*700*3500mm | 1550*1000*4200mm | 4000*1000*4550mm | 2000*1450*4300mm |

机器特点

- 液压提箱，提高工作效率，方便套包和#字捆包
- 采用开门停机设计，使机器更安全可靠
- 装配急停按钮，单独安装，位置醒目，使操作更安全
- 装配自动平衡装置，避免因放置物料不当产生意外
- 采用日本进口NOK密封圈，使用寿命更长
- 采用日本A.M.C油管接头，确保不漏油
- 独特的电机和泵的直叉连接，保证泵和电机100%同心，替代了一般的联轴器联结方式，提高了泵的使用寿命



Features

- Hydraulic lifting chamber door improves the work efficiency, conveniently for packaging and the ‘#’ tying
- The ram will stop running downwards when the feeding gate is opened which ensure the safety of the operation
- Equipped with independent emergency stop for safe operation
- Special ram guides design makes the platen not slope because of uneven materials feedings during compression
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Peculiar combination of motor and pump with direct-crossed connection makes sure 100 percent concentricity, which replacing the common coupling connection so that extend the lifespan of the pump