

铝合金异型材打包机

Aluminum Alloy Frame Balers


机器应用

专门用于铝合金异型材等类似产品的压缩打包。


Usage

Widely used for compressing aluminum alloy frames etc.

Diagram (Model XTY-1200LA12080)

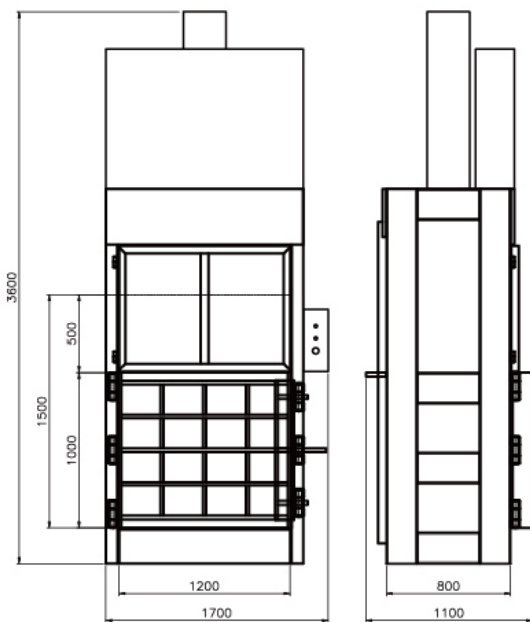

Bale Size (Model XTY-1200LA12080)

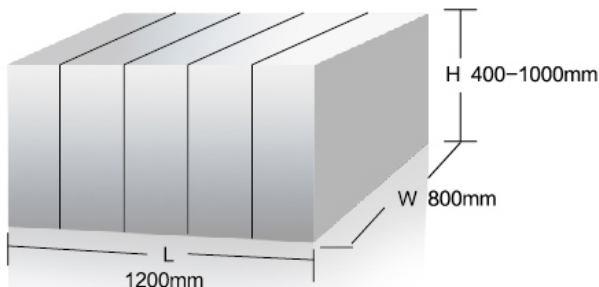

参数 Specifications

| 型号 | XTY-1200LA12080 | XTY-1500LA15076 |
|---|-----------------------|-----------------------|
| 压力 Pressure | 120tons | 150tons |
| 加料口尺寸 (L*H) Feed Opening Size (L*H) | 1200*500mm | 1500*600mm |
| 压缩腔高度 Baling Chamber Height | 1500mm | 1600mm |
| 包块尺寸 (L*W*H, H可调) Bale Size (L*W*H, H is adjustable) | 1200*800*(400-1000)mm | 1500*760*(400-1000)mm |
| 包块重量 Bale Weight | 80-200kgs | 100-250kgs |
| 功率 Power | 15kw | 18.5kw |
| 机器重量 Machine Weight | 4500kgs | 5500kgs |
| 机器外观尺寸 Machine Overall Dimension | 1700*1100*3600mm | 2200*1300*3800mm |

机器特点

- 自动挂链出包，提高了工作效率
- 采用开门停机设计，使机器更安全可靠
- 装配急停按钮，单独安装，位置醒目，使操作更安全
- 采用欧美标准的防弹门结构，能保护操作者的安全
- 装配自动平衡装置，避免因放置物料不当产生意外
- 采用日本进口NOK密封圈，使用寿命更长
- 采用日本A.M.C油管接头，确保不漏油
- 独特的电机和泵的直叉连接，保证泵和电机100%同心，替代了一般的联轴器联结方式，提高了泵的使用寿命



Features

- Automatic chain bale ejector for quickly and easily ejecting the bales out from the machine
- The ram will stop running downwards when the feeding gate is opened which ensure the safety of the operation
- Equipped with independent emergency stop for safe operation
- Equipped with Euro and U.S standard anti-rebound gate structure which makes sure the safety of operation
- Special ram guides design makes the platen not slope because of uneven materials feedings during compression
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Peculiar combination of motor and pump with direct-crossed connection makes sure 100 percent concentricity, which replacing the common coupling connection so that extend the lifespan of the pump